




# Soleo 6065

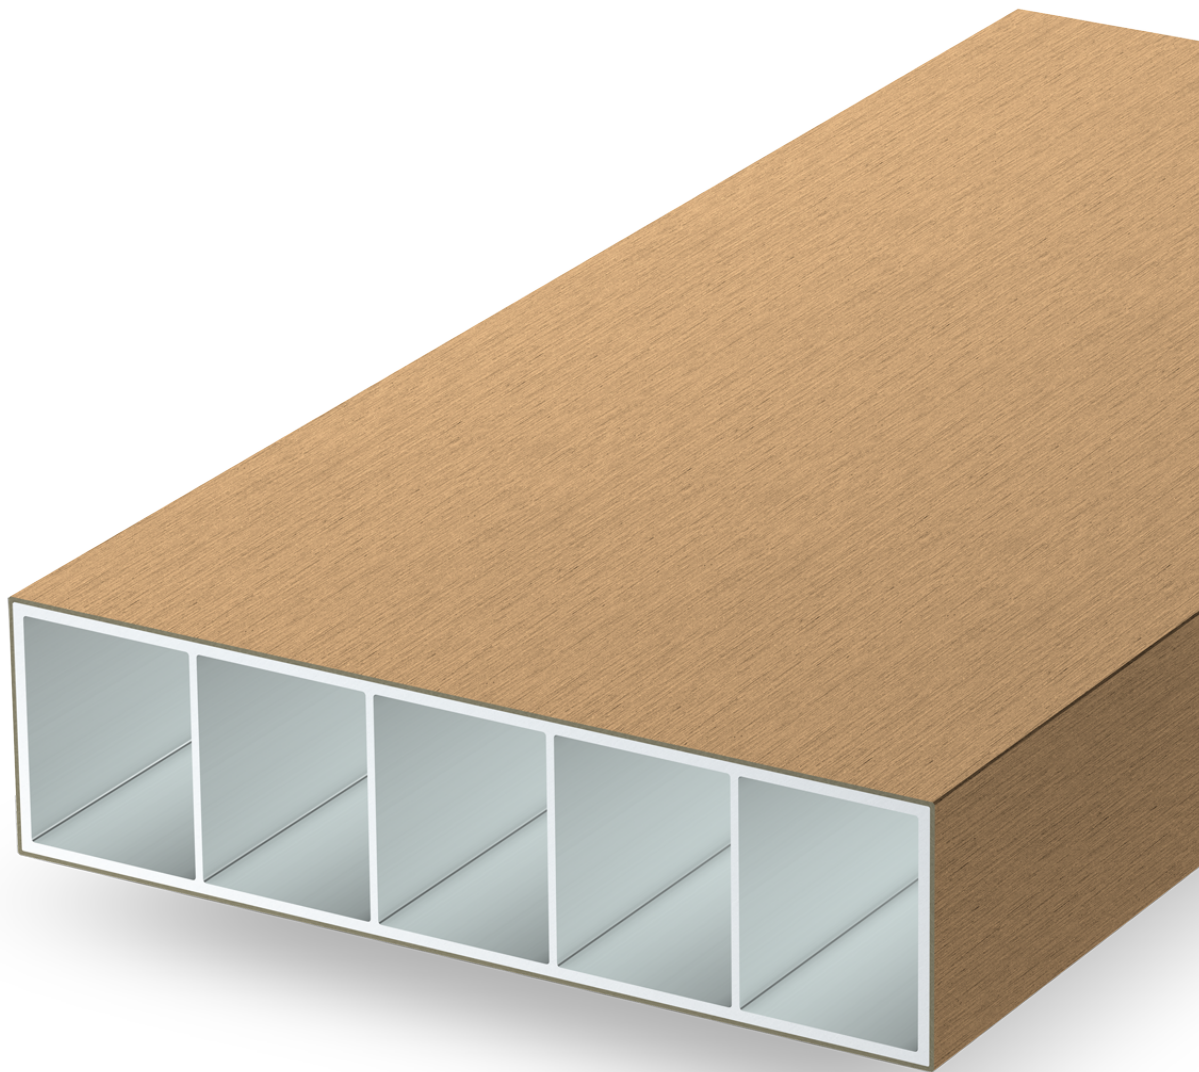

**11 in <sup>3</sup>/<sub>4</sub> x 3 <sup>1</sup>/<sub>4</sub> in or 300 mm x 80 mm**

Technical datasheet




# Soleo 6065

WHS: Wood hybrid system

# Geolam®

Architectural Eco-Technology

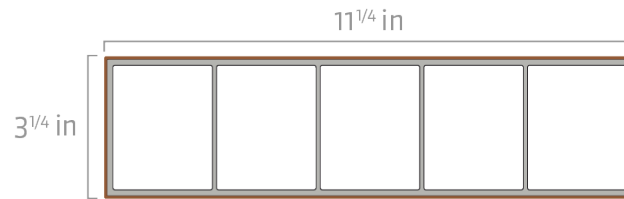

Section tolerances in mm: +/- 2.0 mm or +/- 3/32 in

The outer wpc layer is sanded. The provided dimensions are average thickness (as well for all drawing in that document)

#### Fire rating:

#### On request:

ASTM E-84 class A

Euroclass NF EN 135011 : B, s3-d0

Euroclass NF EN 135011 : A2, s3-d0

NFP 92 -507 : M2 or M1

#### Surfaces finish: Sanded

Other surface textures available on request. Sanding finish and/or shading may vary between runs. WPC thickness may vary in compliance with flame test requirements.

**Profiles fastening and installation:** Check our website [www.geolam.com](http://www.geolam.com)

Technical information may change without warning.

**Standard length:** 9 ft 10 in | 3.0 m

**On order any length from:** 7 ft to 19 ft 8 in | 2.15 m to 6 m

**Weight:** 6.12 lb/ft | 9.10 kg/m

**Secondary moment Ix (cm<sup>4</sup>):** 315.57

**Secondary moment Iy (cm<sup>4</sup>):** 2670.17

**Section modulus Z+x (cm<sup>3</sup>):** 81.97

**Section modulus Z-x (cm<sup>3</sup>):** 81.97

**Section modulus Z+y (cm<sup>3</sup>):** 179.81

**Section modulus Z-y (cm<sup>3</sup>):** 179.81

**Core in anodized aluminum alloy:** A6063S-T5 Serie 6000

**Coefficient of Thermal Expansion (20-100°C):**

23.4 µm/m/°C

**Modulus of Elasticity:** 68.9 GPa

**Max Tensile Strength:** 186 Mpa

#### Carbon Footprint:

**WPC :** 1.54 kg CO<sub>2</sub> /Kg WPC

**Alu :** 0.87 kg CO<sub>2</sub> /Kg Alu



Teak



Limba



Rosewood



Wenge



Bilinga




Carbon



Ivory



Any color on request

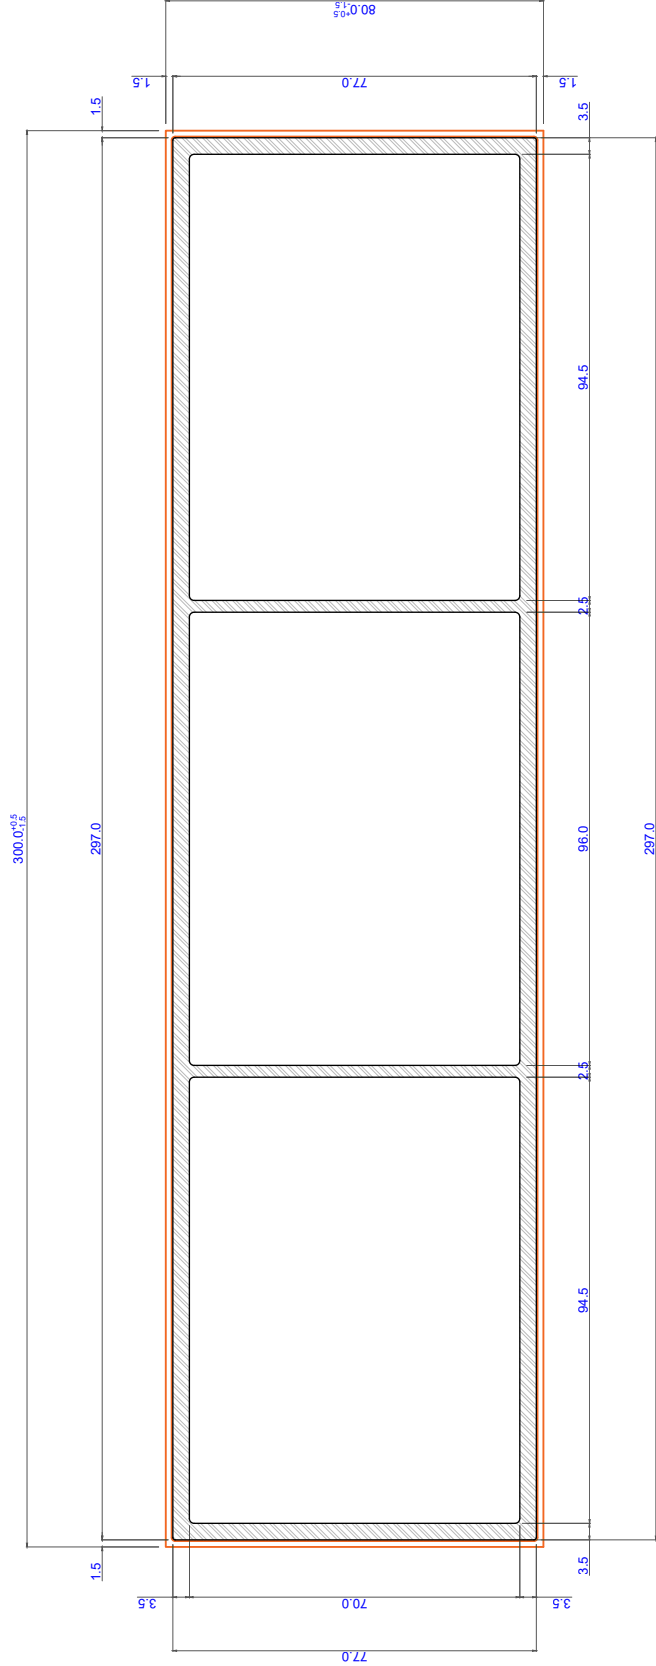

| Technical specifications, dimensions in mm            |         |  | Wood hybrid system WHS |  | Type 1.0 |
|-------------------------------------------------------|---------|--|------------------------|--|----------|
| Weight (kg/ml)                                        | 9.10    |  | Soleo 6065             |  |          |
| Cross section, secondary moment Ix (cm <sup>4</sup> ) | 315.57  |  |                        |  |          |
| Cross section, secondary moment Iy (cm <sup>4</sup> ) | 2670.17 |  |                        |  |          |
| Cross section coefficient Z+x (cm <sup>3</sup> )      |         |  | 81.97                  |  |          |
| Cross section coefficient Z-x (cm <sup>3</sup> )      |         |  | 81.97                  |  |          |
| Cross section coefficient Z+y (cm <sup>3</sup> )      |         |  | 179.81                 |  |          |
| Cross section coefficient Z-y (cm <sup>3</sup> )      |         |  | 179.81                 |  |          |